

RYCO FILTERS




FITTING INSTRUCTIONS FOR RYCO CABIN FILTERS RCA155C & RCA176C.


M/B Sprinter - VW LT

(Filter is located in engine bay below windscreen)


- 1** Unfasten velcro (Bur) fasteners on the foam cover, Pull the cover up slightly and disengage.

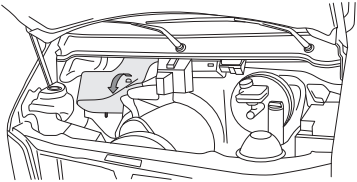


- 2** Fold the cover down and away.

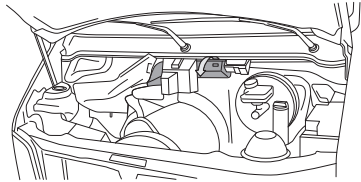


- 3** Disconnect one quick-release fastener on front. With the left hand, reach through from underneath and disengage the rear quick-release fastener.

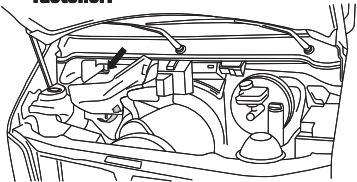


- 4** Push filter cover to the right and remove.

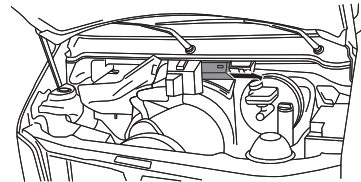

- 5** Remove used filter and replace with RycO RCA176C noting direction of air flow

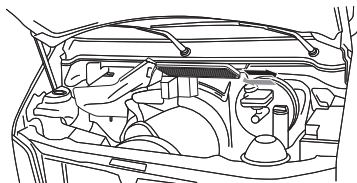

- 6** Push on filter cover and locate foam cover in position.
Dispose of used filter correctly.

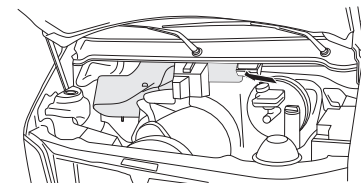

GUD Automotive Pty Ltd
245 Sunshine Road Tottenham
Victoria 3012 Australia.
www.rycofilters.com.au

GUD (NZ) Ltd
626A Rosebank Road Avondale
Auckland, New Zealand
www.ryco.co.nz