


# RYCO FILTERS



FITTING INSTRUCTIONS FOR RYCO CABIN FILTER RCA283P.

SUBARU LIBERTY 2.0L (10/98 - ON)

SUBARU OUTBACK (../99 - ON)

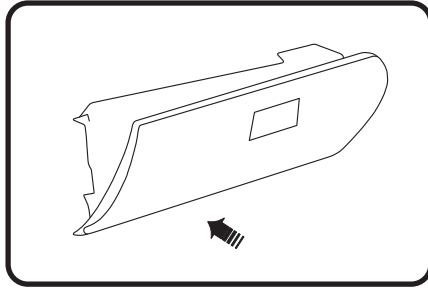

1. The cabin air filter is located behind the glove box compartment. To gain access to the cabin air filter the entire unit requires removing.
2. For better working space, slide the passenger seat all the way back. Open the glove box, remove both top corner retaining lugs from the inside so the lid can be dropped completely.
3. The centre console side trim must be removed so the compartment can be taken out. There are several screws located around the glove box housing frame that need removing, undo them all and remove the side trim first and then pull the compartment out until the light connector is visible and disconnect. Continue pulling out the compartment.
4. Identify the cabin air filter housing and unclip the lid from the bottom section. Slide out the old cabin air filter carefully to avoid any accumulated debris from being spread around.
5. Slide in the new filter into the plastic frame (reuse the one that came out) making sure it faces the correct air flow direction. Slide the frame into the housing and refit all components in reverse order.

GUD Automotive Pty Ltd  
29 Taras Ave Altona North  
Victoria 3025 Australia.  
[www.rycofilters.com.au](http://www.rycofilters.com.au)

GUD Automotive -  
A division of GUD (NZ) Holdings Limited  
626A Rosebank Road Avondale  
Auckland, New Zealand  
[www.ryco.co.nz](http://www.ryco.co.nz)